


Datasheet:

Cable tie PA6.6 / internally serrated coloured

Our coloured cable ties offer you the ideal solution for marking and bundling cables easily and securely. The different colour options mean you always have an overview and make organisation easier. Thanks to the high material quality, they are particularly robust and durable. Perfect for tradespeople and professionals who prioritise precision and reliability.

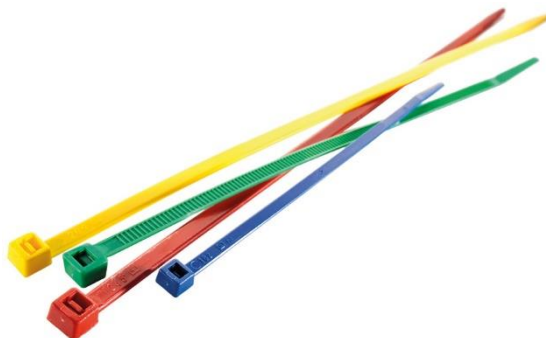

Technical data:

Material:

PA 6.6 (Polyamide 6.6 / lead-free cadmium-free)

Colors:

Blue, red, yellow, green, orange, brown
(Custom printing available on request)

Operating temperature:

-40 °C to +85 °C (+110 °C for a short time)

Installation temperature:

-10 °C to +60 °C

Fire protection properties:

Base material is self-extinguishing
(UL 94 V-2 certification available)

Chemical resistance:

resistant to oils, greases, soaps, alcohol, petrol, hydrocarbons,
detergents, reactive agents

Standards:

REACH, RoHS



Size chart (all colours above available!):

Article no.	Designation	Dimensions [mm]	Minimum holding force [N]*	Max. bundling [mm]	Color	PU [pcs.]
22072	K10025B	100 x 2,5	80	24	blue	100
22076	K14036B	140 x 3,6	180	36	blue	100
22110	K20036B	200 x 3,6	180	52,5	blue	100
22081	K20048B	200 x 4,8	220	50	blue	100
22086	K29048B	290 x 4,8	220	75	blue	100
22095	K36048B	360 x 4,8	220	103	blue	100
22120	K36078B	360 x 7,8	530	103	blue	100
22130	K54078B	540 x 7,8	530	159	blue	100
22140	K55090B	550 x 9	800	163,5	blue	100

(Subject to technical changes!)

*** Minimum holding force based on EN 62275 / higher holding forces possible for some versions.**

More information at: <https://www.emc-direct.de> / info@emc-direct.de / Phone: +49 (0)2369 – 98469 -15

Data sheet cable ties PA6.6 Premium / internally toothed / colored / version (English version): 3 / 18.02.2026