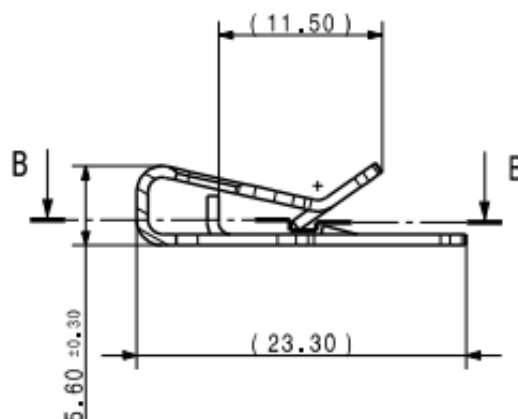


Datasheet:**Metal PV earthing clamp**
Article: 95116 / Solar earthing clamp

These high-quality earthing clamps are the quick and easy fastening solution without screws. Installation saves time and only requires a flick of the wrist. The clamp can be positioned anywhere on the profile, regardless of the distance between the modules. This earthing clamp is suitable for all modules with an aluminium frame thickness of 1.2 to 2.5 mm and multi-wire, flexible cables with a cross-section of 6 mm².

**Technical data:****Material:**

Steel (C67S) / coated

Surface protection:

Tin-tin alloy

Colours:

metallic/ grey

Design:Earthing clip for a multi-strand, flexible cable (H07V-K6 mm²)**Dimensions**

L/W/H: 23.3 x 20.0 x 5.6 mm

Cable diameter:6,0 mm²**Length of clamping area:**

23,3 mm

UV resistance:

yes / UV weather-resistant (40+ years)

Earth continuity/ Standards:

IEC 60947-1:2001, compliant with IEC 61730-2:2007, after 96 hours of salt spray according to EN 60068-2-11:1999, RoHS

Packaging unit (PU):

100 pcs.

